



PRODUCT SUMMARY


DATARACK 4 post open frame ultra-rigid racks for high-density application for networking and data centre applications. The rack vertical frames are made out of MS Sheet with powder coated and high-quality manufacturing standards. Product available in 42U & 45U variants.

PRODUCT FEATURES

- Conforms to DIN 41494 or Equivalent ISO standard.
- Two top angles and heavy-duty assembly hardware for a rack to handle heavier loading.
- Easy of assembling by high quality fasteners.
- High-strength, lightweight MS sheet / aluminum channels.
- Panel Mounting Holes: M6/12-24/cage nut M6 threads in both flanges.
- Conductive M6 tapped/12-24/cage nut M6 DIN standard holes-100% assured conductivity with the rack. Eliminate Separate grounding strip.
- Powder Coated provide a uniform appearance and protection against aluminum oxidation corrosion.
- Weight capacity of 300 – 700 Kgs Static
- 100% assured compatibility with all equipment conforming to DIN 41494. (General industrial standard)
- Grounding & bonding options.
- Custom configurations and assemblies available by special order.

OPTIONAL ACCESSORIES

- Cable organizers (Vertical Cable Manager PVC / METAL)
- 1U/2U Cantilever Tray
- Power distribution units
- Rack ground kit
- Cable runways (Ladder)
- Extended leg/casters

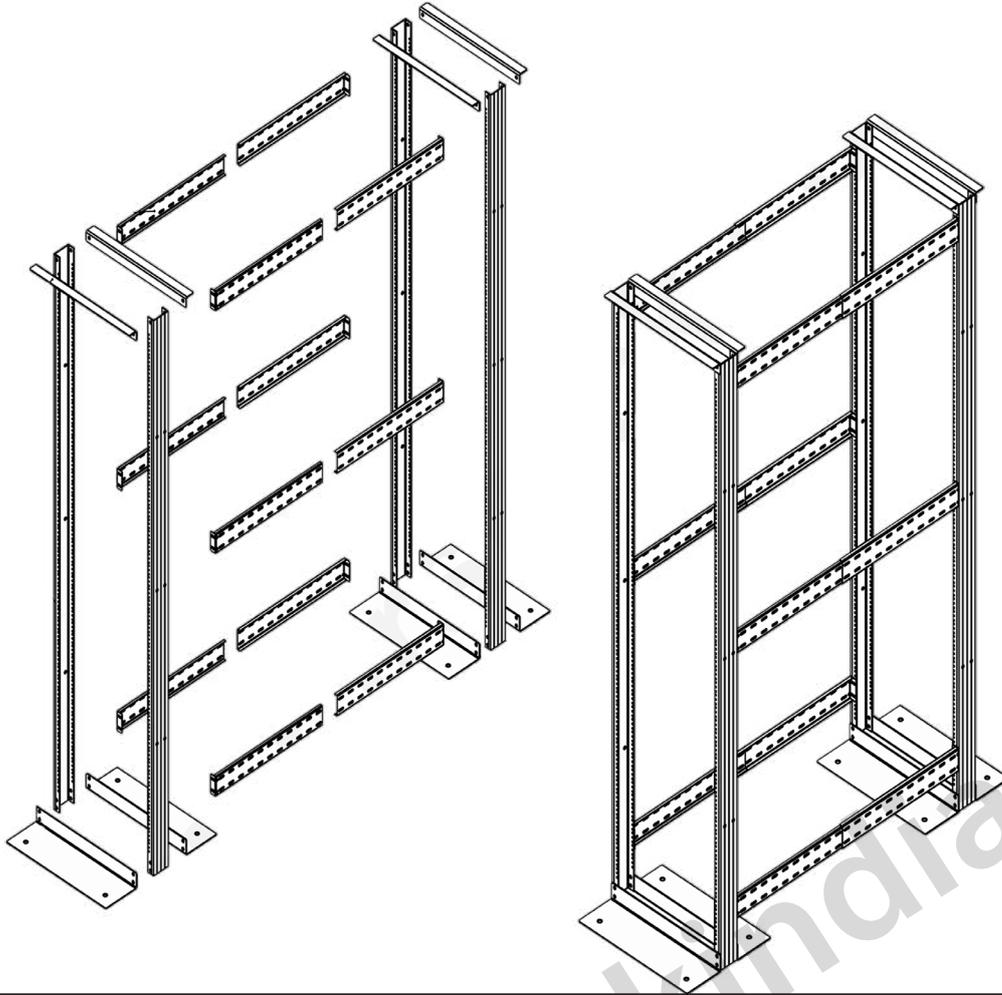

TECHNICAL SPECIFICATION

Rack Standard	Conform to DIN 41494 or equivalent standard
Construction	Welded or CKD (Knockdown)
Basic Frame	Mild Steel / Aluminum
Equipment Mounting	DIN Std M6 tapping
Standard Finish	Powder coated
Standard Mounting	Grouting
Standard Color	Black
Load Capacity	300-700Kgs

DATARACK 4 POST OPEN FRAME RACK PART CODE & DIMENSIONS

PART CODE	TOTAL HEIGHT IN MM (H)	USABLE HEIGHT (H)	TOTAL WIDTH IN MM (W)	USABLE WIDTH IN INCHES (W)	TOTAL DEPTH IN MM (D)
DRT-4PO-6060-42U	2005	42U	600	19"	600
DRT-4PO-6080-42U	2005	42U	600	19"	800
DRT-4PO-6010-42U	2005	42U	600	19"	1000
DRT-4PO-8080-42U	2005	42U	800	19"	800
DRT-4PO-8010-42U	2005	42U	800	19"	1000
DRT-4PO-6060-45U	2005	45U	600	19"	600
DRT-4PO-6080-45U	2005	45U	600	19"	800
DRT-4PO-6010-45U	2005	45U	600	19"	1000
DRT-4PO-8080-45U	2005	45U	800	19"	800
DRT-4PO-8010-45U	2005	45U	800	19"	1000